





Stocked Sections


Sill Flashings

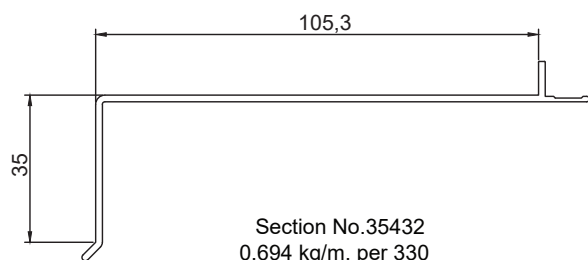


Section No.35432
0.694 kg/m, per 330

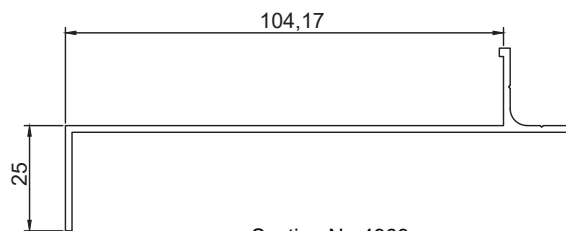


Section No.4969
0.703 kg/m, per 329

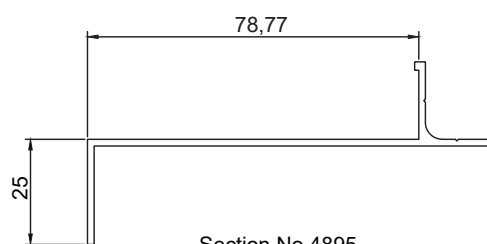

Section No.4895
0.595 kg/m, per 278

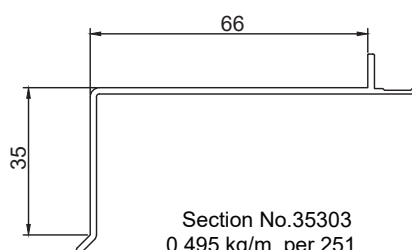

Section No.35303
0.495 kg/m, per 251

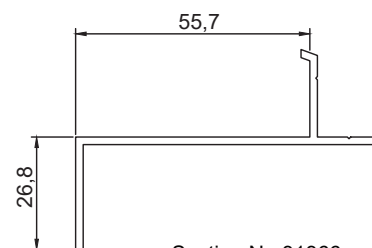


Section No.31366
0.582 kg/m, per 242



Stocked Sections

Head Flashings

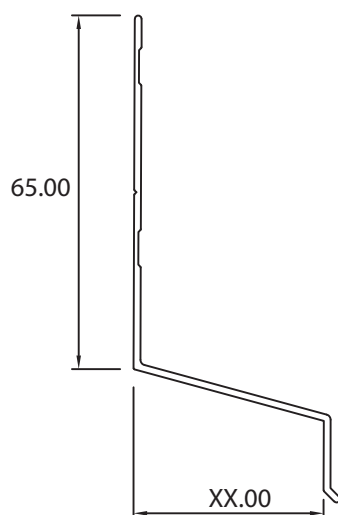

Section No.	XX.00 mm	Mass kg/m	Periphery mm
35361	15	0.298	194.4
35362	20	0.315	205.0
35363	25	0.332	215.1
35364	30	0.348	225.0
35365	35	0.379	235.9
35366	40	0.397	246.0
35300	45	0.429	256.7
35301	50	0.448	267.0
35302	55	0.464	257.5
35484	60	0.484	288.0
35367	65	0.530	290.8
35368	70	0.557	308.0
35369	75	0.578	319.0
36814	80	0.597	329.0
37069	85	0.617	340.0
37070	90	0.637	350.0