

Note : Stocked in various short lengths and finishes, please refer to Shower Channel Page for more details.


* Stock in mill, anodised & powder-coated finishes. Subject to check availability at time of order.

+ Stock in Cool Room Section may have drill guide V - grooves. Refer to drawings in coolroom tab.


Stock in Wellington Branch only, it normally takes 3-5 working days to transfer..

S


Section No.	A	B	T1	T2	R	Periphery mm	Mass kg/m
J168	10	10	1.6	1.6		57	0.116
5978	12	12	1.6	1.6		69	0.142
X075	14.5	17.95	1.2	1.2		97	0.162
YLJ02571	15	18	1.6	1.6	Note	99	0.209
5979	16	16	1.6	1.6		93	0.194
31017	17	17	1.5	1.5		63	0.170
XYC18X17	17.6	18.4	1.8	1.8	Note	105	0.248
YLJ02511	18	25	2	2	Note	132	0.349
5980	20	20	3	3		114	0.437
3470	22.23	12.7	1.57	1.57		92	0.190
30504	22.4	19	2	2		70	0.678
9335	25	25	1.6	1.6		147	0.310
4575	25	25	3	3		144	0.559
6476	25	40	3	3		204	0.801
4087	25	50	3	3		248	1.036
J088	32	25	3	3		158	0.618
G210	36	36	2.5	2.5		211	0.698
F9531	38	38	3	3		220	0.876
F9354	40	12	3	3		122	0.472
9677	40	20	1.6	1.6		157	0.332
5982	40	20	3	3		154	0.599
6452	40	25	3	3		174	0.680
2114	44.5	25	3	3		183	0.717
5983	50	25	3	3		194	0.761
5984	50	50	3	3		294	1.166
U50-25	50.8	25.4	2.5	2.5		198	0.654
+ RB-069	53.2	25	1.2	1.2		205	0.328
+ RB-472	53.2	30	3	1.6		220	0.670
+ RB-043	55.6	30	1.5	2.3		227	0.504
G743	60	12	3	3		162	0.634
6945	60	32	4	4	4	238	1.257
+ RB-708	66	25	3	2		225	0.634
30487	75	25	3	3		244	0.967
# 0288	76.2	38.1	4.75	4.75		289	1.900
RB-207	78	25	1.6	1.6		178	0.541
K747	78	38	1.5	1.5		305	0.610
J458	80	40	3	3		314	1.252
+ RB-301	89	25	1.5	1.5		281	0.569
+ Z381	92	25	2.5	1.5		279	0.769
8716	100	25	3	3		294	1.166
J089	100	50	3	3		394	1.577
6982	100	50	6	6		387	3.046
+ K748	103	38	1.5	1.5		355	0.712
+ RB-206	103.2	25	1.6	1.6		301	0.654
Z383	117	25	2.5	1.5		328	0.953
+ YLJ025299	150	55	7	7		501	4.708
F9783	150	75	3.5	3.5		592	2.768
4760	150	75	5	5		590	3.915
+ E210	160.2	38.5	2	2.3		463	1.245
+ Z382	168	25	2.5	1.5		428	1.326
YLJ025231	180	60	6.35	8		582	5.506
37577	220	75	4.5	4.5		729	4.403




Section No. RB-041
38mm Internal Angle
0.306kg/m, per 149




Section No. RB-042
38mm External Angle
0.311kg/m, per 152

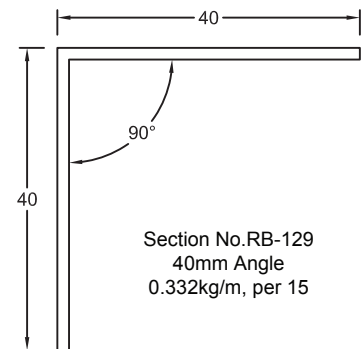


Section No. RB-129
40mm Angle
0.332kg/m, per 15

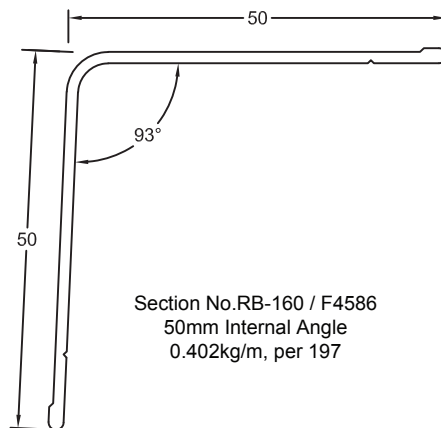


Section No. RB-160 / F4586
50mm Internal Angle
0.402kg/m, per 197

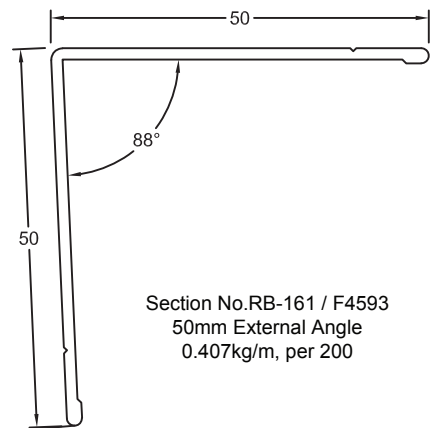


Section No. RB-161 / F4593
50mm External Angle
0.407kg/m, per 200

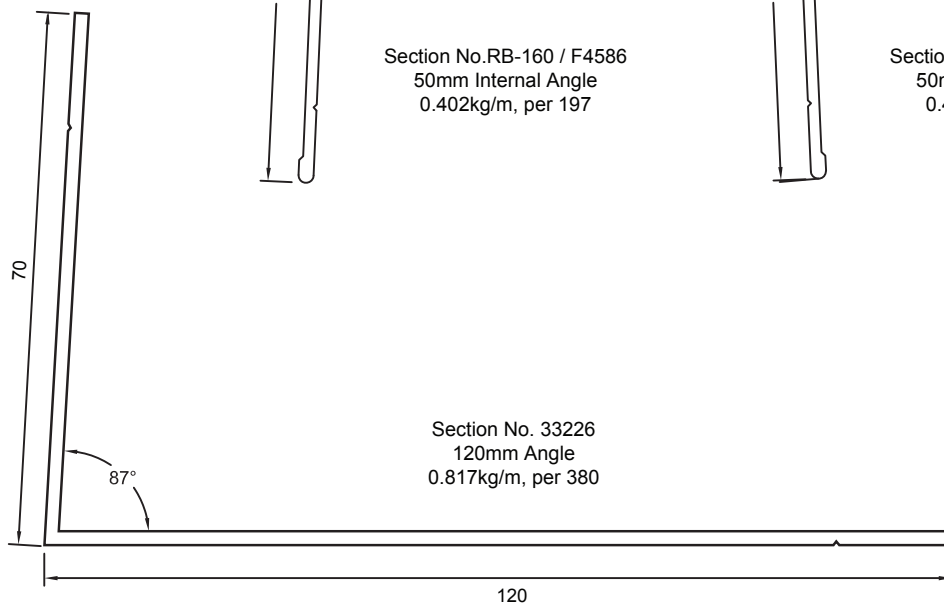


Section No. 33226
120mm Angle
0.817kg/m, per 380

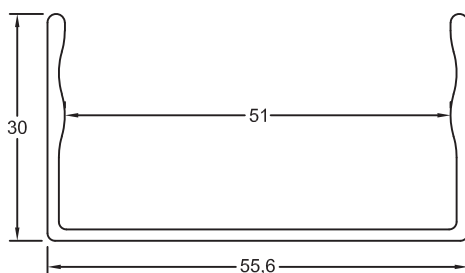


Section No. RB-043
51mm Channel
0.504kg/m, per 227

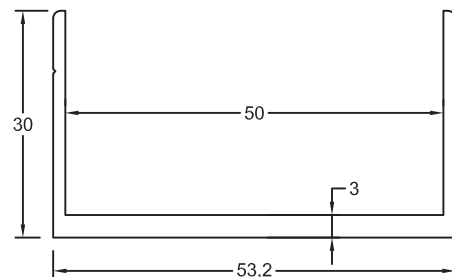


Section No. RB-472
50mm Heavy Channel
0.670kg/m, per 220

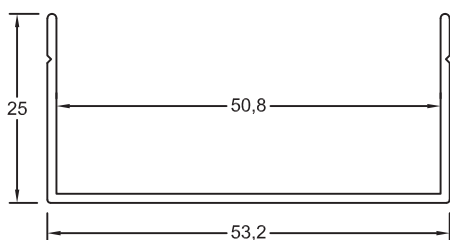


Section No. RB-069
50mm Capping
0.328kg/m, per 203

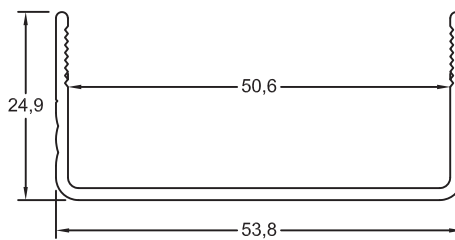


Section No. 33901 / RB-317
Fluted 50mm Capping
0.416kg/m, per 204

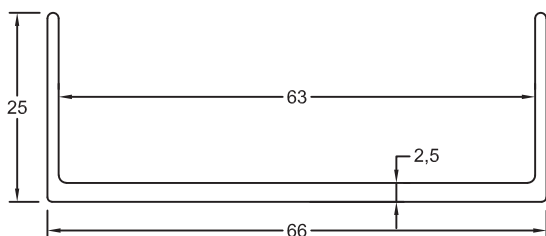


Section No. RB-708
63mm Channel
0.634kg/m, per 224

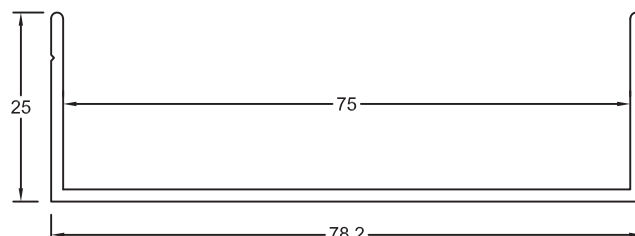


Section No. RB-207
75mm Channel
0.544kg/m, per 252

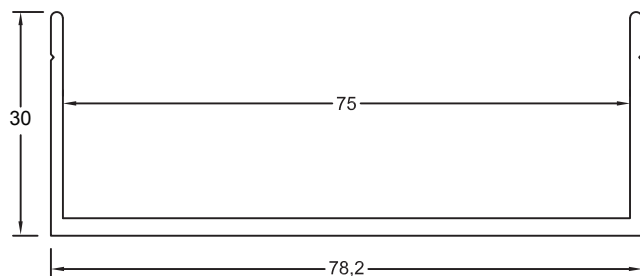







Section No. RB-1023
75mm Heavy Channel
0.865kg/m, per 270

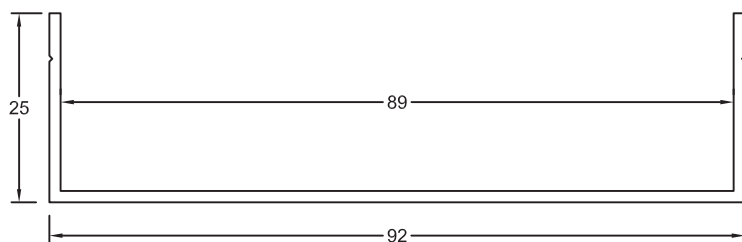


Section No. RB-301
89mm Channel
0.568kg/m, per 282

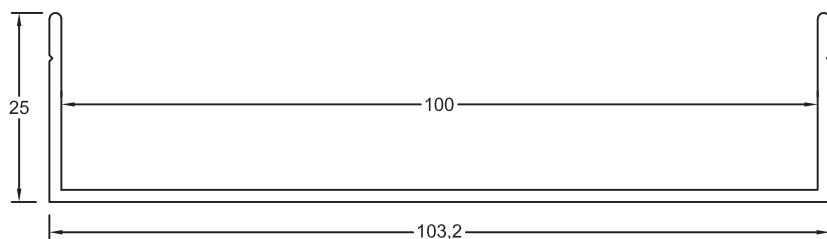


Section No. RB-206
100mm Channel
0.653kg/m, per 302

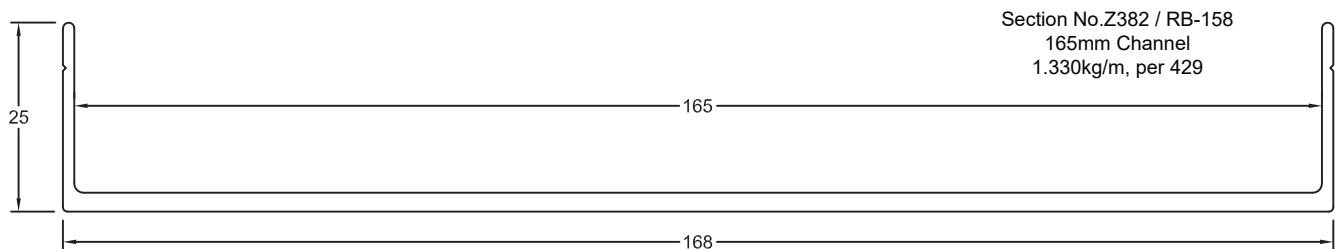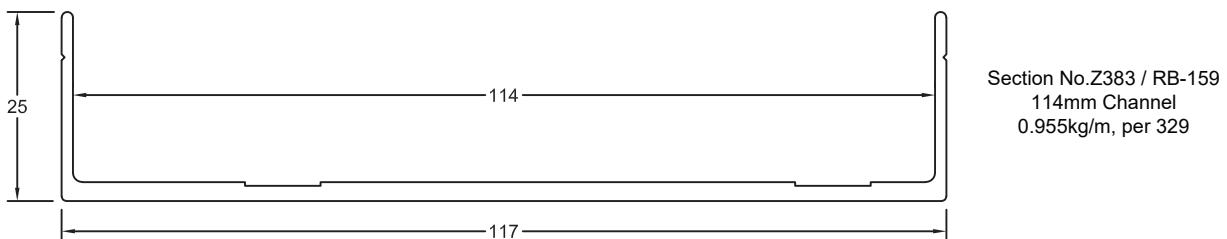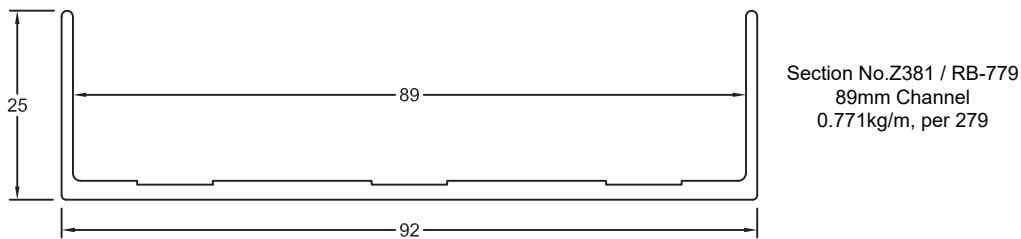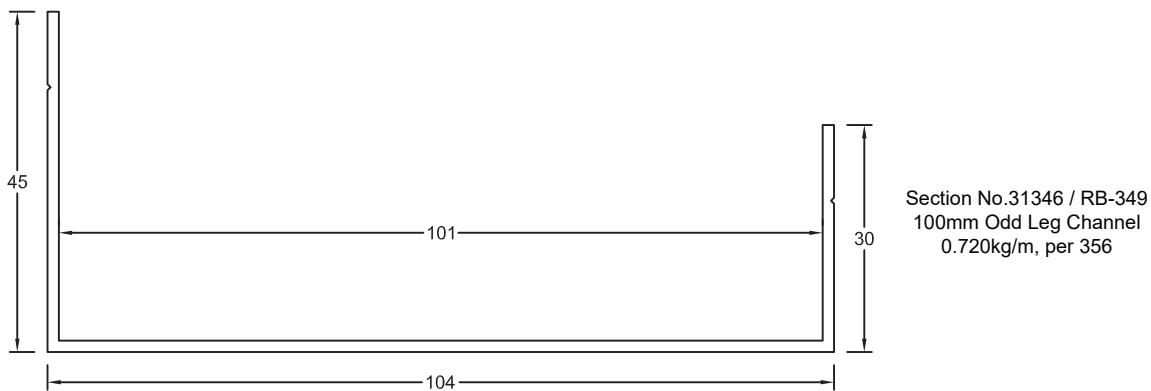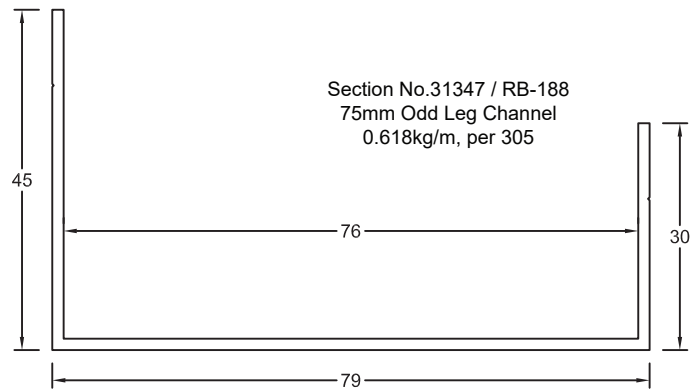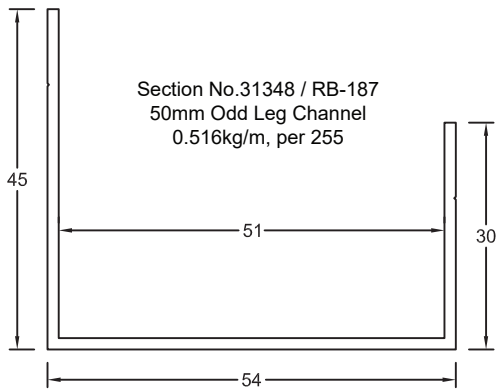


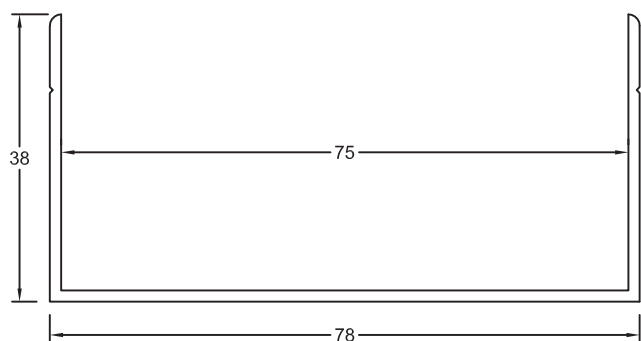


Section No.K747 / RB-140
75mm Channel
0.615kg/m, per 304

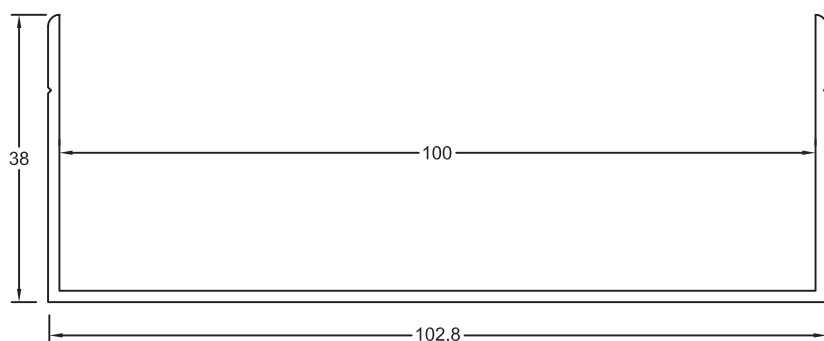

Section No.K748 / RB-456
100mm Channel
0.717kg/m, per 354

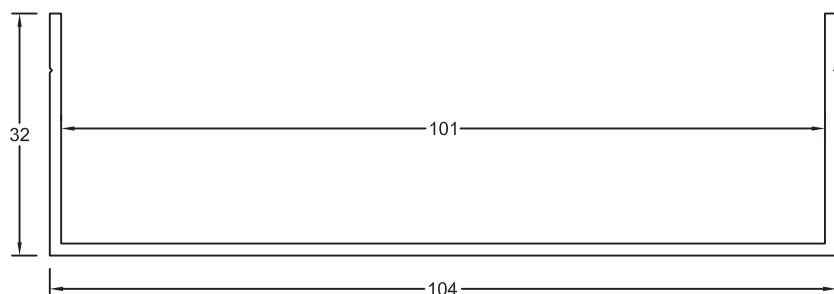

Section No.RB-502
100mm Channel
0.703kg/m, per 333

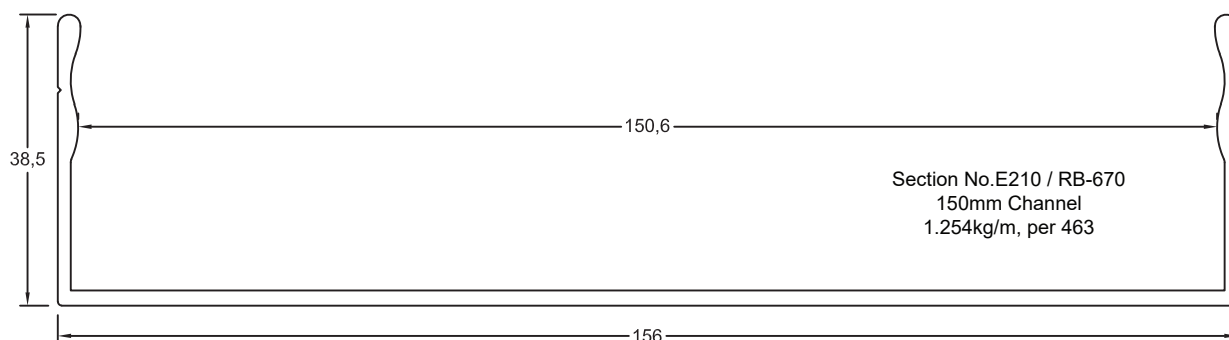

Section No.E210 / RB-670
150mm Channel
1.254kg/m, per 463